




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : F01M 5/00, F16N 39/00, F01P 11/08, B60R 17/00, B60K 11/02</p>	A1	<p>(11) International Publication Number: WO 99/43931</p> <p>(43) International Publication Date: 2 September 1999 (02.09.99)</p>
<p>(21) International Application Number: PCT/SE99/00201</p> <p>(22) International Filing Date: 16 February 1999 (16.02.99)</p> <p>(30) Priority Data: 9800619-0 27 February 1998 (27.02.98) SE</p> <p>(71) Applicant (for all designated States except US): VOLVO WHEEL LOADERS AB [SE/SE]; S-631 85 Eskilstuna (SE).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): SJUNNESSON, Halvar [SE/SE]; Ripvägen 28, S-633 69 Skogstorp (SE).</p> <p>(74) Agents: BERG, S., A. et al.; Albihns Patentbyrå Stockholm AB, P.O. Box 5581, S-114 85 Stockholm (SE).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Swedish).</p>

(54) Title: COOLING AND HEATING SYSTEM

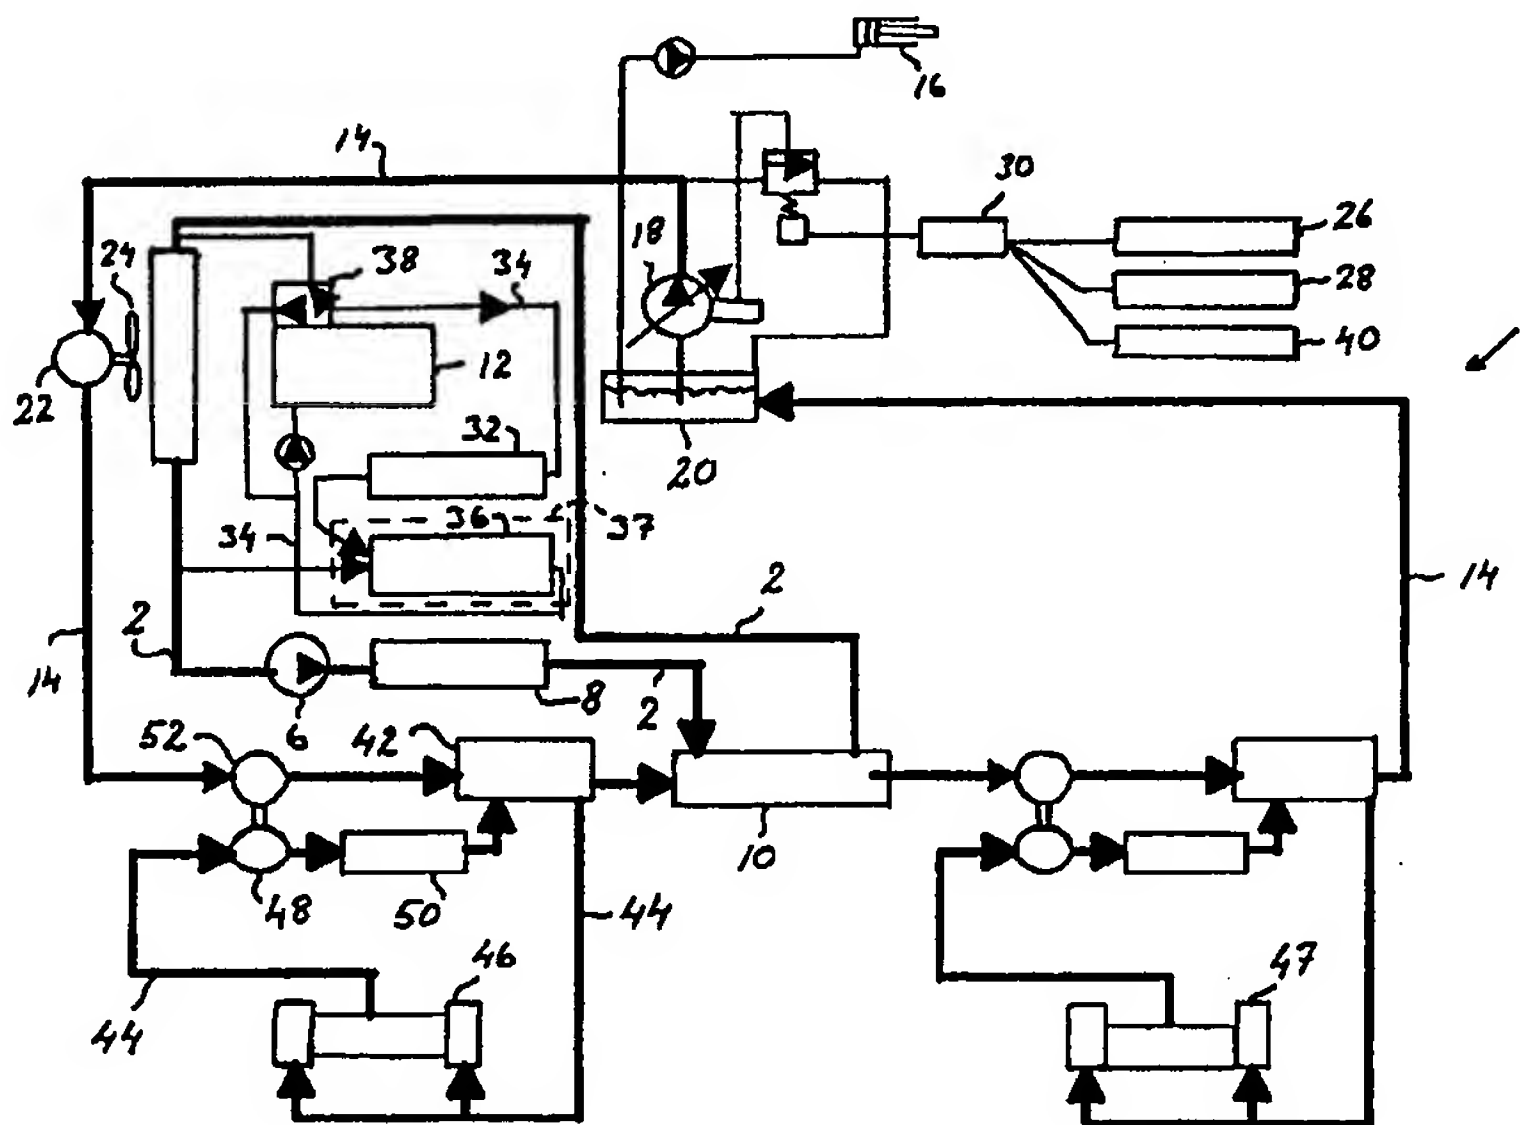

(57) Abstract

The invention relates to a cooling and heating system for a machine, such as a wheeled loader or dumper, comprising a main line (2) arranged so as to contain a fluid, a first heat exchanger (4) which is connected to the main line (2), and a charge-air cooler (8) for cooling compressed charge air for an internal combustion engine (12) arranged in the machine, which charge-air cooler (8) is connected to the main line (2). A second heat exchanger (10) is connected to the main line (2) downstream of the charge-air cooler (8), to which second heat exchanger (10) a hydraulic liquid line (14) is connected, so that heat can be transferred between the fluid in the main line (2) and the hydraulic liquid in the hydraulic liquid line (14).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Cooling and heating system
for a machine**

The present invention relates to a cooling and heating system for a machine, such as a wheeled loader or dumper according to the precharacterizing clause of Patent Claim 1.

Machines such as wheeled loaders and dumpers comprise a number of components which are controlled by hydraulics. For example, hydraulic cylinders are used in order to operate a working implement, such as a scoop, which is arranged on a loading arm assembly of a wheeled loader.

When the machine is cold-started, it is desirable to increase the temperature of the hydraulic liquid in the hydraulic system of the machine rapidly so as to reduce friction and wear in hydraulic cylinders and other hydraulic components. Reduced friction results in the fuel consumption of the vehicle being lower. When the temperature increases, the quantity of water given off from the hydraulic liquid also increases, which is desirable.

When the hydraulic liquid has been heated up and the hydraulic components of the machine are used, heat is generated as a result of the increase in pressure in the hydraulic liquid. The hydraulic liquid must then be cooled so that the hydraulics system is not damaged by the temperature of the hydraulic liquid being too high.

In order to reduce friction losses and thus reduce the fuel consumption of the machine, it is also desirable that the transmission oil in the gearbox of the machine and the lubrication oil in the wheel axles of the machine are heated up rapidly when the machine is cold-started.

In the same way as for the hydraulics system, it is necessary to cool the transmission oil and lubrication oil when the machine is used in order that the gearbox and the wheel axles are not damaged.

- 2 -

It is previously known to heat up the hydraulic liquid of a machine by means of the cooling water from an internal combustion engine in the machine. The disadvantage of heating the hydraulic liquid using the cooling water of the internal combustion engine is that it takes too long to heat up the hydraulic liquid, which results in high fuel consumption when the machine is cold-started.

The object of the present invention is to bring about rapid heating up of the hydraulic liquid of a machine in order to reduce the fuel consumption of the machine when cold-started.

Another object of the present invention is to achieve rapid heating up of the lubrication oil for at least one wheel axle of the machine.

A further object of the present invention is to achieve rapid heating up of the transmission oil for a gearbox of the machine.

A further object of the invention is to achieve cooling of the hydraulic liquid, the lubrication oil and the transmission oil during operation of the vehicle.

This is achieved by means of a cooling and heating system according to Patent Claim 1.

Such a cooling and heating system provides rapid heating up of the hydraulic liquid, the lubrication oil and the transmission oil, which reduces the fuel consumption of the machine, and also reduces wear on the hydraulics system, the wheel axles and the gearbox of the machine. The cooling and heating system also provides controlled cooling of the hydraulic liquid, the lubrication oil and the transmission oil when the machine is used.

The invention will be described in greater detail by means of the appended figures showing exemplary embodiments, in which

Fig. 1 shows a cooling and heating system according to a first embodiment of the present invention, and

- 3 -

Fig. 2 shows a cooling and heating system according to a second embodiment of the present invention.

5 The cooling and heating system 1 according to Fig. 1 comprises a main line 2 which is connected to a first heat exchanger 4, a feed pump 6, a charge-air cooler 8 and a second heat exchanger 10. The main line 2 contains a fluid. The feed pump 6 causes the fluid to circulate in the main line 2.

10 The first heat exchanger 4 can, as shown in Fig. 1, constitute a radiator for an internal combustion engine 12 which is used to drive the machine in which the cooling and heating system 1 is arranged. The charge-air cooler 8 is arranged so as to cool
15 compressed charge air which is to be supplied to the internal combustion engine 12. The compression of the charge air is brought about by an exhaust-gas turbo or compressor (not shown). The charge air is heated up during compression. In order to obtain a greater air
20 mass per unit of volume in the fuel/air mixture in the internal combustion engine 12 and thus increase the power rating of the internal combustion engine 12, the charge air is cooled in the charge-air cooler 8. As shown in Fig. 1, the second heat exchanger 10 is
25 connected to the main line 2 downstream of the charge-air cooler 8. The heat given off from the charge air to the fluid in the main line 2 will be conveyed by the fluid to the second heat exchanger 10.

A hydraulic liquid line 14 is connected to the
30 second heat exchanger 10. In the hydraulic liquid line 14, hydraulic liquid circulates, which is used for inter alia various hydraulic components 16 of the machine, such as hydraulic cylinders. The hydraulic liquid is caused to circulate by means of a variable
35 hydraulic liquid pump 18 which is connected to the hydraulic liquid line 14. The hydraulic liquid flows to a hydraulic liquid tank 20. From the hydraulic tank 20, the hydraulic liquid is pumped to the hydraulic components 16 of the machine.

- 4 -

A first hydraulic motor 22 is connected to the hydraulic liquid line 14, which first hydraulic motor 22 is arranged so as to drive a fan 24 which is arranged so as to bring about an air flow through the first heat exchanger 4 in order to cool the fluid in the main line 2.

When the machine is cold-started, the hydraulic liquid in the hydraulic liquid line 14 is cold. When the hydraulic components 16 of the machine are used, the wear and the friction in the hydraulic components 16 will be great, which leads to the machine having to perform a great deal of work to drive the hydraulic components 16. This leads to the fuel consumption of the machine increasing.

As the charge air is cooled by the charge-air cooler 8 as soon as the internal combustion engine 12 is started, the heat carried away from the charge-air cooler 8 will be supplied to the second heat exchanger 10, as described above. As the hydraulic liquid passes through the second heat exchanger 10, the heat from the fluid in the main line 2 will be transferred to the hydraulic liquid which is thus heated up.

When the hydraulic liquid has reached a suitable working temperature, the fluid in the main line 2 will carry away any excess heat from the hydraulic liquid. This is brought about by virtue of the fluid which passes through the second heat exchanger 10 also passing through the first heat exchanger 4 in which cooling of the fluid takes place.

A first temperature sensor 26 is positioned in the hydraulic liquid tank 20 and a second temperature sensor 28 is positioned in the first heat exchanger 4, in contact with the fluid. The first and second sensors 26, 28 are connected to a control unit 30 which controls the variable hydraulic liquid pump 18. By increasing the flow of the variable hydraulic pump 18, the fan 24 will bring about increased cooling of the fluid in the main line 2.

- 5 -

Fig. 1 also shows a cab heat exchanger 32 which is connected to a cooling water line 34 for the internal combustion engine 12. The purpose of the cab heat exchanger 32 is to heat up a cab (not shown) in which a driver, who drives the machine, sits. A transmission heat exchanger 36 is also connected to the cooling water line 34 of the internal combustion engine 12, downstream of the cab heat exchanger 32. The transmission heat exchanger 36 is connected to a gearbox (not shown) of the machine. On cold-starting, cooling water, which is heated up by the internal combustion engine 12, will pass through the cab heat exchanger 32 and the transmission heat exchanger 36. This results in rapid heating up of both the cab and the gearbox. On cold-starting, the cooling water does not pass through the first heat exchanger 4, which is ensured by a thermostat 38 of the internal combustion engine 12.

When the internal combustion engine 12 is hot, the thermostat 38 opens and the cooling water is conveyed through the first heat exchanger 4. Cooling of the gearbox can be brought about if the temperature of the gearbox exceeds the temperature of the cooling water. As shown in Fig. 1, the main line 2 can be connected to the cooling water line 34, so that the liquid circulating in the main line 2 also circulates in the cooling water line 34.

A third temperature sensor 40 is positioned in the gearbox and connected to the control unit 30. If the third temperature sensor 40 sends signals to the control unit 30 that the gearbox or transmission oil in the gearbox is too hot, the variable hydraulic liquid pump 18 increases the flow of hydraulic liquid so that the cooling by the fan 24 of the cooling water in the first heat exchanger 4 increases.

Fig. 2 shows a second embodiment of the invention. Connected to the hydraulic liquid line 14 is a third heat exchanger 42 which is arranged so as to cool or heat the lubrication oil which is contained in

- 6 -

a lubrication oil line 44. The lubrication oil line 44 is connected to the third heat exchanger 42, a wheel axle 46 of the machine, a lubrication oil pump 48, a filter 50 and on to the third heat exchanger 42 in order to form a closed circuit. The lubrication oil pump 48 is driven by a second hydraulic motor 52 which is connected to the hydraulic liquid line 14.

When the machine is cold-started, the lubrication oil is viscous, which results in the friction and wear on the wheel axle 46 and the transmission (not shown) present on the wheel axle 46 increasing. As the hydraulic liquid will be heated up rapidly on cold-starting, as described above, the lubrication oil in the lubrication oil line 44 will also be heated up by the heated hydraulic liquid. This heat transfer takes place in the third heat exchanger 42. The lubrication oil line 44 described, which forms a closed circuit, can be provided for each wheel axle 46 of the vehicle. Fig. 2 shows two separate closed circuits for two wheel axles 46, 47 of the machine. Alternatively, one closed circuit can be provided for two or more wheel axles.

When the machine is used, heat is generated in the wheel axles 46, 47. This heat can be carried away by means of the lubrication oil and the third heat exchanger 42..

Patent Claims

1. Cooling and heating system for a machine, such as a wheeled loader or dumper, comprising a main line
5 (2) arranged so as to contain a fluid, a first heat exchanger (4) which is connected to the main line (2), and a charge-air cooler (8) for cooling compressed charge air for an internal combustion engine (12) arranged in the machine, which charge-air cooler (8) is
10 connected to the main line (2), characterized in that a second heat exchanger (10) is connected to the main line (2) downstream of the charge-air cooler (8), to which second heat exchanger (10) a hydraulic liquid line (14) is connected, so that heat can be transferred
15 between the fluid in the main line (2) and the hydraulic liquid in the hydraulic liquid line (14).
2. Cooling and heating system according to Claim 1, characterized in that a first hydraulic motor (22) connected to the hydraulic liquid line (14) is arranged
20 so as to drive a fan (24), which fan (24) is arranged so as to bring about an air flow through the first heat exchanger (4) in order to cool the fluid in the main line (2).
3. Cooling and heating system according to Claim 1 or 2, characterized in that a variable hydraulic liquid pump (18) is connected to the hydraulic liquid line (14), which hydraulic liquid pump (18) is arranged so as to bring about a variable hydraulic liquid flow in the hydraulic liquid line (14).
- 30 4. Cooling and heating system according to Claim 3, characterized in that a control unit (30) is connected to the hydraulic liquid pump (18), which control unit (30) is arranged so as to control the hydraulic liquid pump (18) on the basis of the
35 temperature of the fluid and the hydraulic liquid.
5. Cooling and heating system according to any one of the preceding claims, characterized in that at least a third heat exchanger (42) is connected to the hydraulic liquid line (14), to which third heat

- 8 -

exchanger (42) a lubrication oil line (44) for at least one wheel axle (46, 47) arranged on the machine is connected, so that heat can be transferred between the lubrication oil and the hydraulic liquid.

5 6. Cooling and heating system according to Claim 5, characterized in that a second hydraulic motor (52) connected to the hydraulic liquid line (14) is arranged so as to drive a lubrication oil pump (48) connected to the lubrication oil line (44).

10 7. Cooling and heating system according to Claim 5 or 6, characterized in that the lubrication oil line (44) is connected to each wheel axle (46, 47) of the machine.

8. Cooling and heating system according to Claim 5 or 6, characterized in that the lubrication oil line (44) forms a separate circuit for each wheel axle (46, 47) of the machine.

15 9. Cooling and heating system according to any one of the preceding claims, characterized in that a cooling water line (34) connected to the internal combustion engine (12) comprises a cab heat exchanger (36) and a transmission heat exchanger (36), which transmission heat exchanger (36) is arranged in a gearbox (37) of the machine and which transmission heat
20 exchanger (36) is connected to the cooling water line (34) downstream of the cab heat exchanger (32).

25 10. Cooling and heating system according to Claim 9, characterized in that the control unit is arranged so as to control the hydraulic liquid pump (18) on the basis of the temperature of the transmission oil in the
30 gearbox (37).

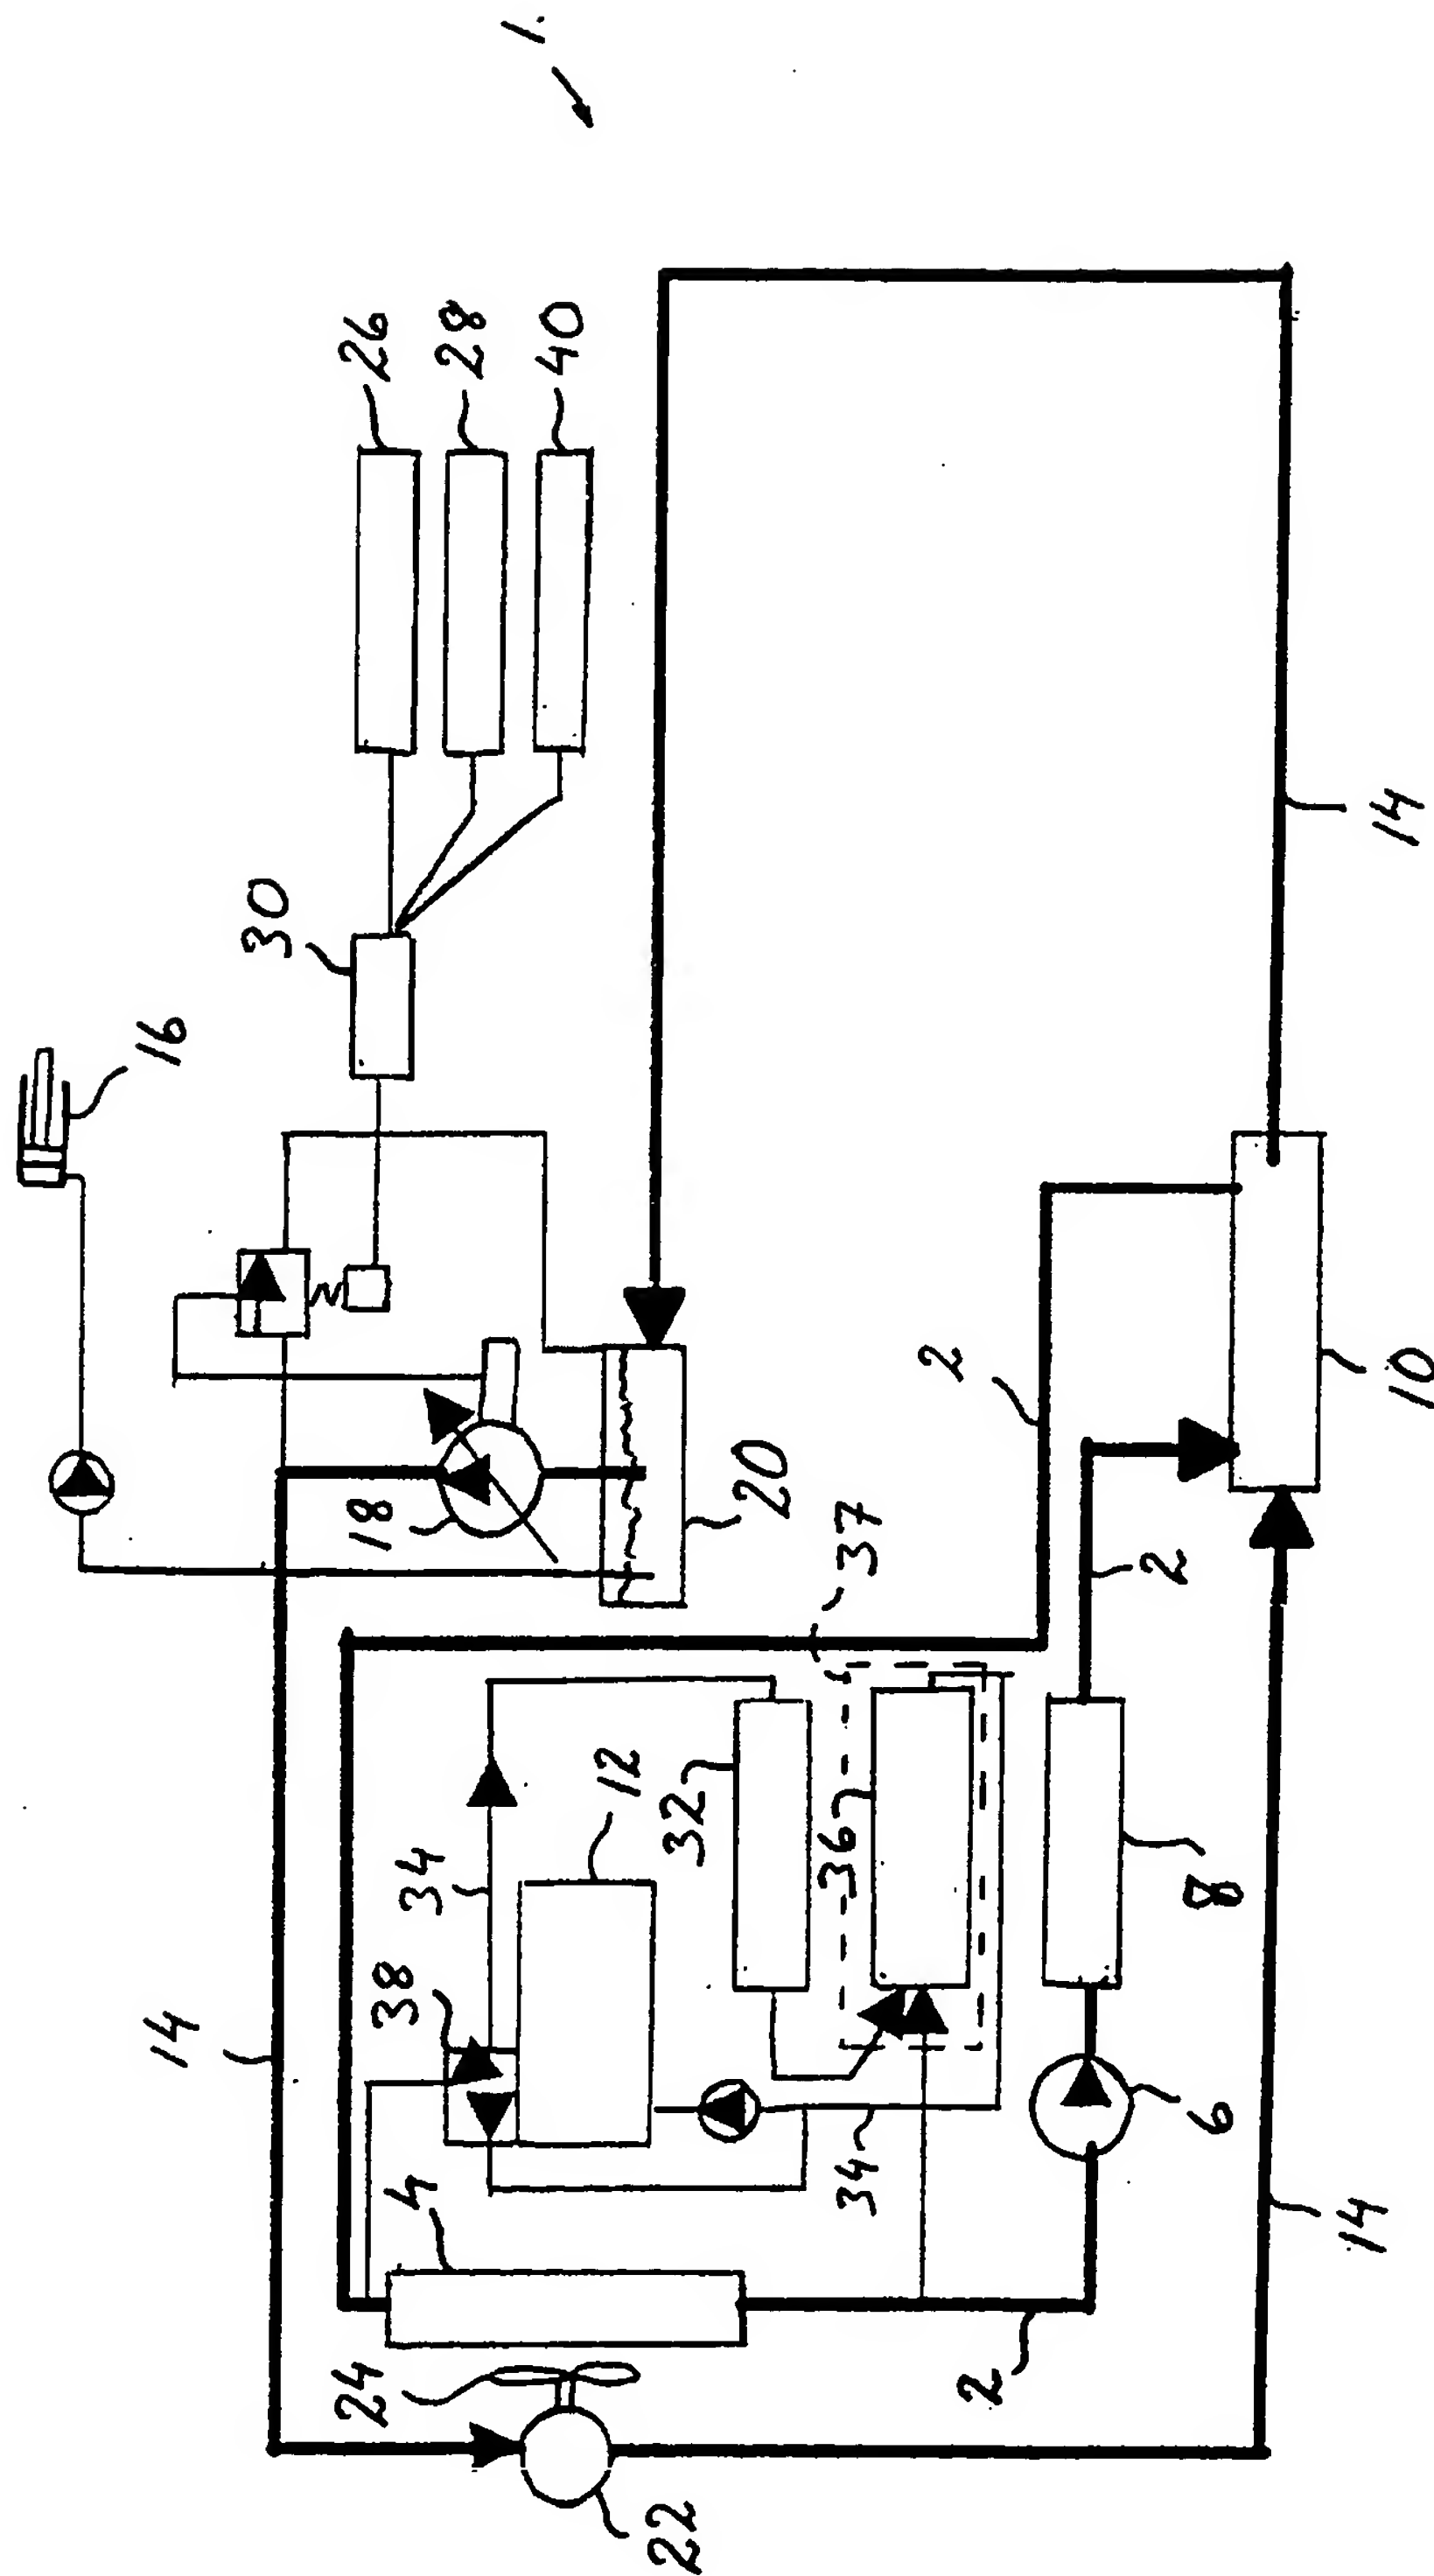


Fig. 1

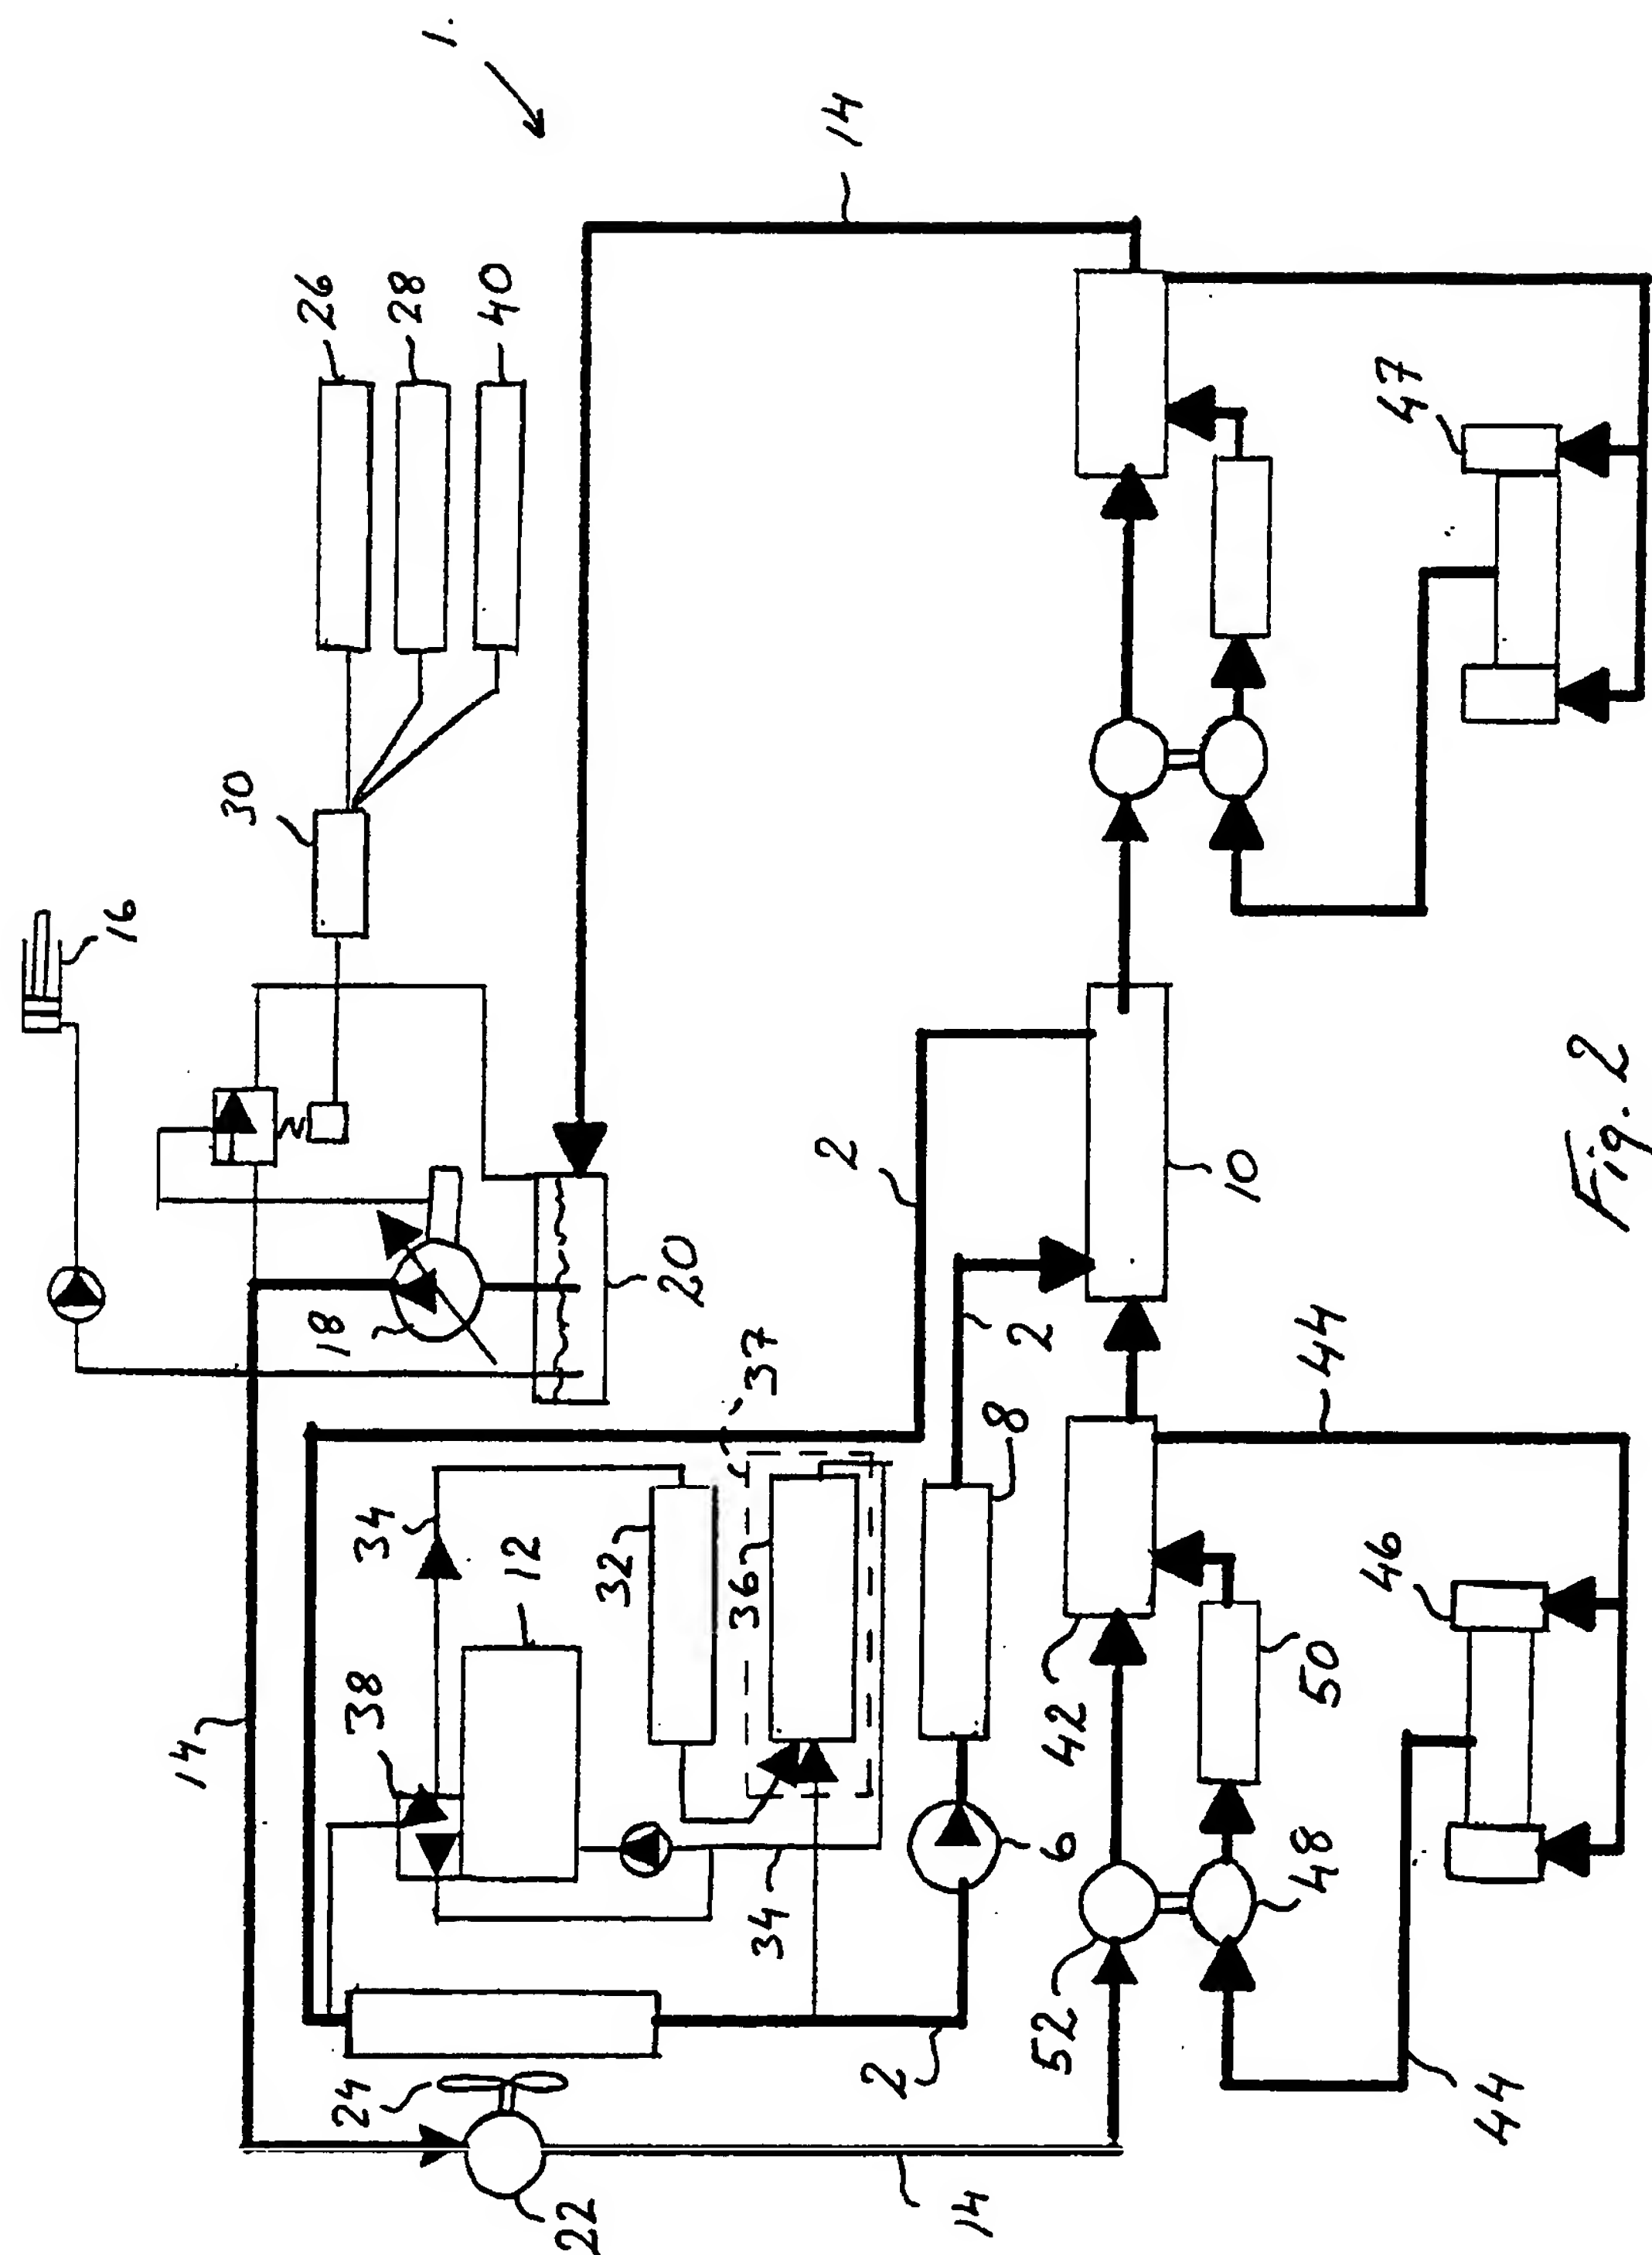


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/00201

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: F01M 5/00, F16N 39/00, F01P 11/08, B60R 17/00, B60K 11/02
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: F01M, F16N, F01P, B60R, B60K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4556024 A (KING ET AL), 3 December 1985 (03.12.85), abstract --	
A	US 4393824 A (FISCHER ET AL), 19 July 1983 (19.07.83), abstract --	
A	DE 4140667 A1 (MERCEDES-BENZ AKTIENGESELLSCHAFT), 17 June 1993 (17.06.93), abstract --	
A	FR 2450720 A1 (KUBOTA, LTD.), 3 October 1980 (03.10.80), page 1, line 1 - page 2, line 34, figures 1,2 --	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 May 1999

Date of mailing of the international search report

20 -06- 1999

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Dan Ionesco

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/00201

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 920614 A (KRAUSS-MAFFEI AKTIENGESELLSCHAFT), 13 March 1963 (13.03.63), page 1, line 76 - page 2, line 21, figures 5-7 -- -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

07/04/99

International application No.

PCT/SE 99/00201

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4556024 A	03/12/85	CA 1258798 A EP 0188132 A,B JP 61164011 A	29/08/89 23/07/86 24/07/86
US 4393824 A	19/07/83	AT 378743 B AT 431081 A CH 654257 A,B DE 3126534 A,C FR 2492327 A,B GB 2088550 A,B SE 447559 B,C SE 8105939 A SU 1303020 A	25/09/85 15/02/85 14/02/86 27/05/82 23/04/82 09/06/82 24/11/86 19/04/82 07/04/87
DE 4140667 A1	17/06/93	NONE	
FR 2450720 A1	03/10/80	BE 882125 A CA 1143303 A DE 3008869 A,C GB 2047854 A,B JP 1161929 C JP 55123792 A JP 57058707 B US 4323137 A	01/07/80 22/03/83 18/09/80 03/12/80 10/08/83 24/09/80 10/12/82 06/04/82
GB 920614 A	13/03/63	NONE	